

## **STEEL-LINE**

# SR60 ROLLER DOOR OPENER



DOOR TYPES: residential rolling garage doors DOOR SIZE: doors up to 13.5m<sup>2</sup>

#### **Key Benefits**



Compliant to Australian and New Zealand Standard AS/NZS 60335-2-95



#### **Soft Start / Stop Function**

Designed to ensure smooth and quiet door operation.



#### **Courtesy Lighting**

Ultra-bright LED llighting illuminates your garage when the opener is activated.



#### **2 Year Warranty**

Backed by a 2 year / 5,000 cycle warranty\* we stand behind our products with an after sales support team that we believe are the best in the industry.

#### **Standard Safety Features**



#### **Premium Automatic Safety Reverse**

With its automatic safety function your garage door will stop and reverse automatically if obstructed going down or stop if obstructed going up.



#### **Automatic Force Sensing**

Equipped with automatic force sensing, with each operation the garage door opener monitors and adjusts the force needed to open your garage door.



#### **Manual Release**

In case of power failure you can simply activate the manual release to open your garage door.







2 x Three channel key ring minitransmitters C945



Wireless wall button CM128




Weight bar

#### **SPECIFICATIONS**

- 24V DC motor with thermal overload protection
- Input voltage: 240V AC
- Rated door area up to 13.5m<sup>2</sup>
- Max door weight up to 60kg
- · Max peak pulling force: 500 N
- 433.92 MHz AM radio with Chamberlain Peak Detect™ rolling code technology
- Up to 64 memory registers
- Garage illumination: 10 standard ultrabright LEDs
- Noise rating 1M: 59dB
- Merlin+ handsets

### **SR60 ROLLER DOOR OPENER**



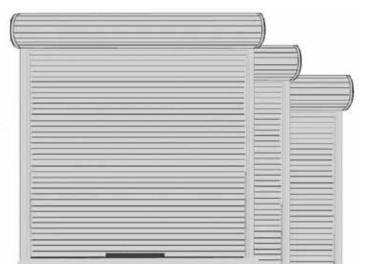

#### **DOOR SPECIFICATIONS**

- Maximum lifting under spring tension = 15kg
- Suitable for steel spring balanced doors

#### **DOOR OPENING AND CLOSING TIMES**



13 seconds




13 seconds


(based on a 2.3m high door)

Max Door Height: 4.5m; Max Door Width: 3.3m; Max Roller Door Area: 13.5m<sup>2</sup> Single dwelling, max door weight: up to 60kg

#### **TYPICAL INSTALLATION**







#### **OPTIONAL ACCESSORIES**



C940

Wall or visor mounted

single channel transmitter



774ANZ

Protector system safety

IR beam kit (includes

wire and brackets)



C840 Wireless keypad



C945 three channel mini-transmitter



Call 1800 427 243 | steel-line.com.au

Proudly distributed by: